


# Organic Photovoltaic Panels

Product Data-sheet

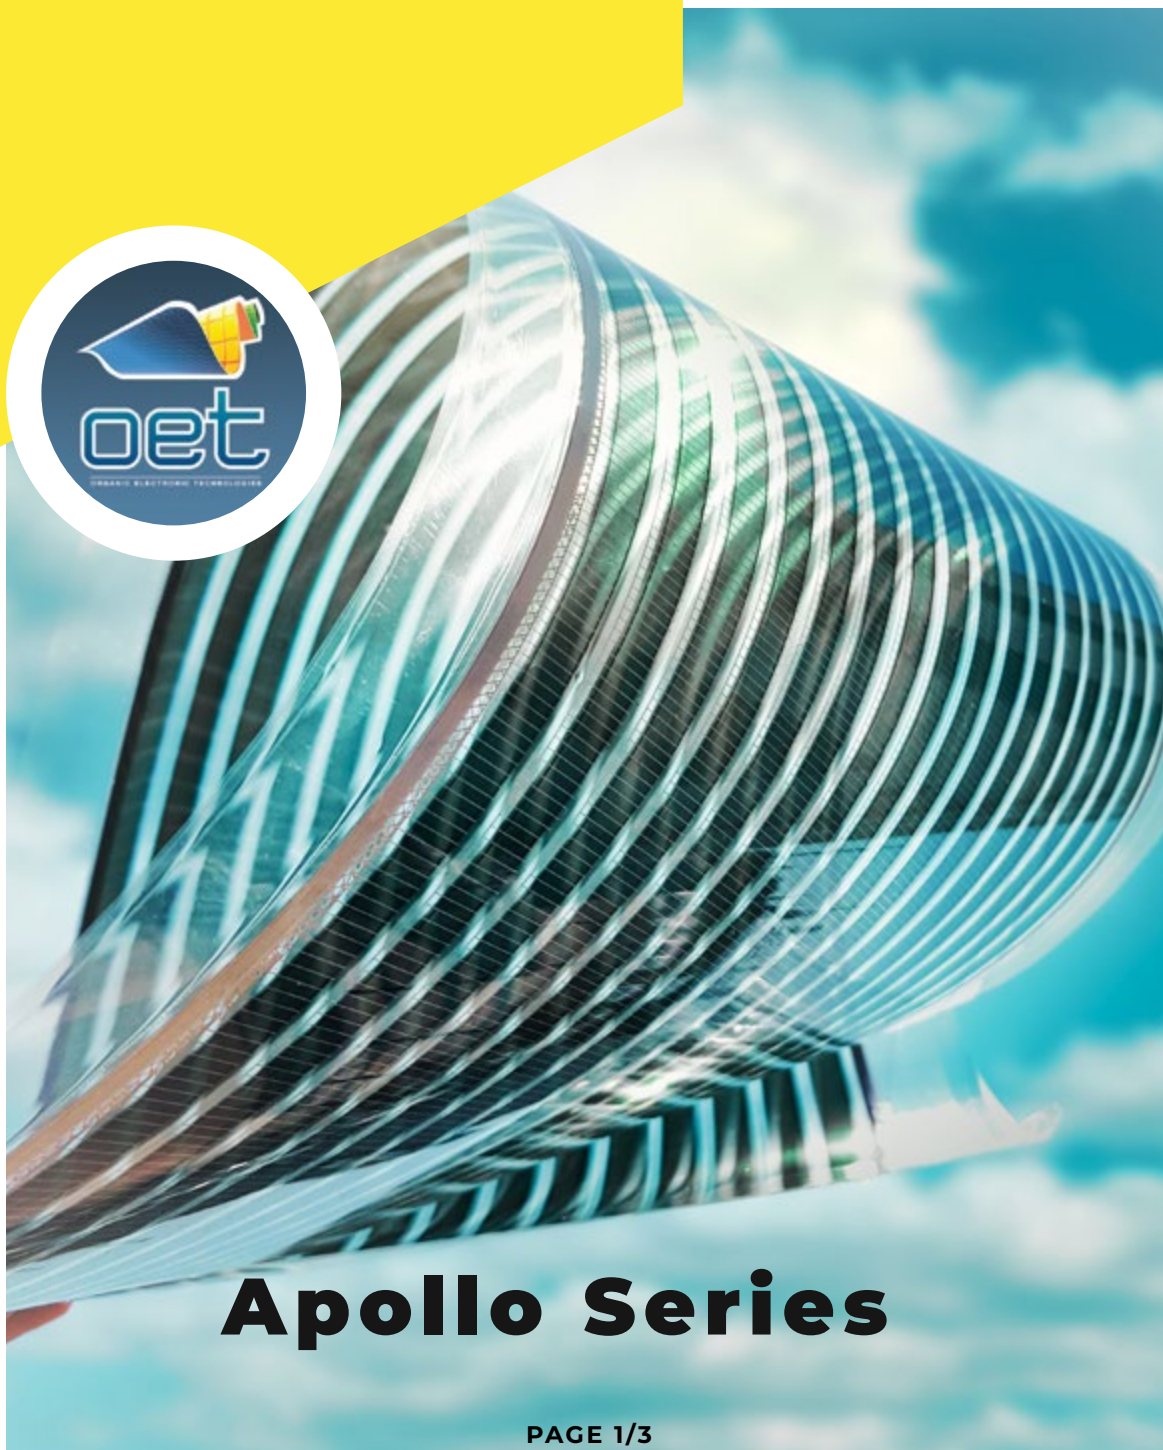

## Apollo Series

PAGE 1/3





## Flexible

Suitable for curved surfaces



## Lightweight

Weighting less than 0.5 kg/m



## Semi - Transparent

Up to 35% optical transparency



## Cost - Effective

Short energy payback time



## Environmentally Friendly

Non-toxic materials, recyclable



## Performance

Indoor and outdoor efficiency



## Large Area Coverage

Building and field applications



## Custom Design

On Demand




## Multicolor Palette

Variety of colors



## Installation

Easy mounting and maintenance

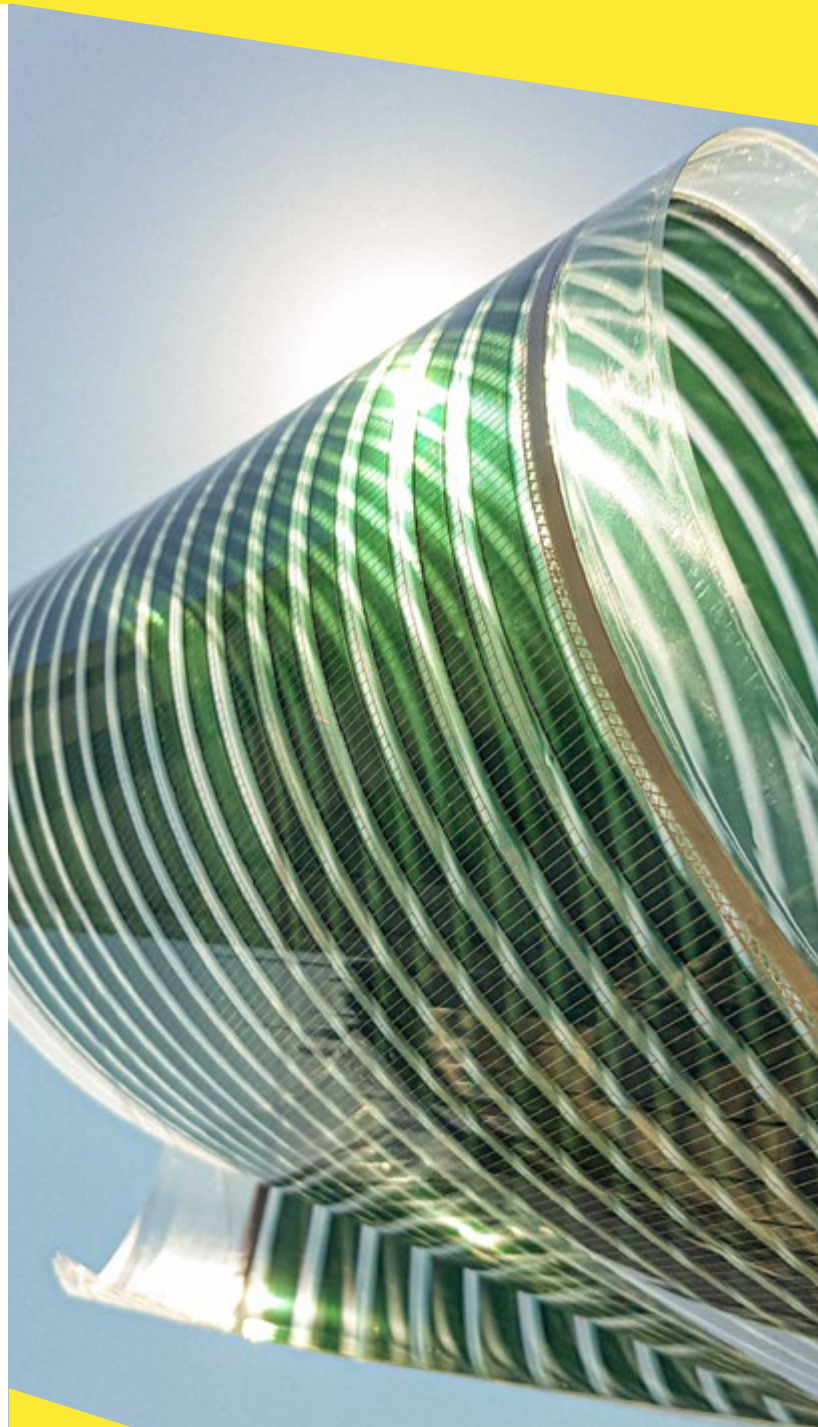




**Product Series    Apollo**

Width (mm)	280
Length (mm)	930
Thickness (mm)	0.4 or greater
Weight (kg/m <sup>2</sup> )	0.5

**Panel Performance \***

Nominal Max. Power (Pmax)	8W
Operating Voltage (Vmp)	9 V
Operating Current (Imp)	0,9 A
Open Circuit Voltage (Voc)	12 V
Open Circuit Current (Isc)	1 A
Operating Temperature	-20 +70 °C

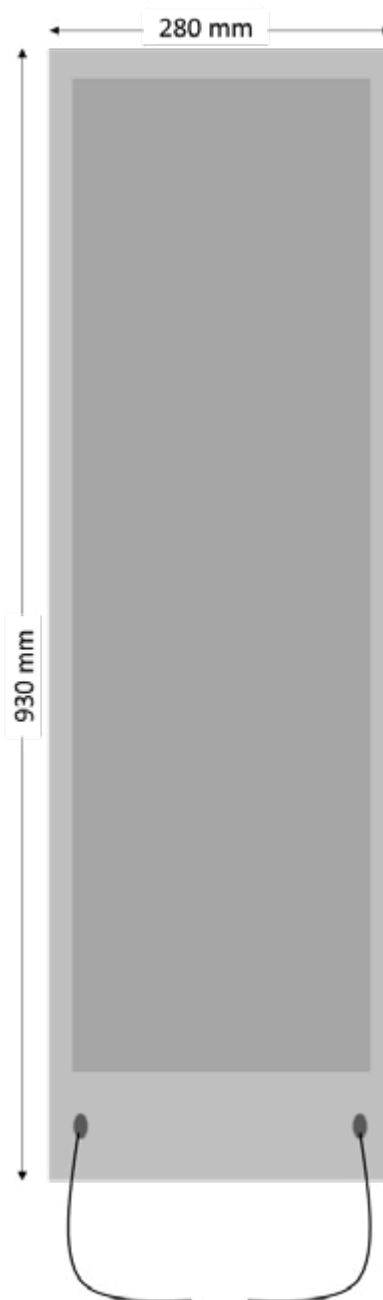

**CONTACT US**

Phone : +30 2312134876  
Email : info@oe-technologies.com  
Website : https://oe-technologies.com/

**OUR LOCATION**

20th km Thessaloniki - Tagarades road  
57001 Thermi, Greece